




Series 8215 | DC Valve Line Extension

2-Way Normally Closed Valves with New Molded Epoxy Watertight and Hazardous Location DC Operators

Applications

- Gas Generators
- Boilers/Burners
- Ovens/Furnaces
- Kilns/Incinerators
- Heating Equipment

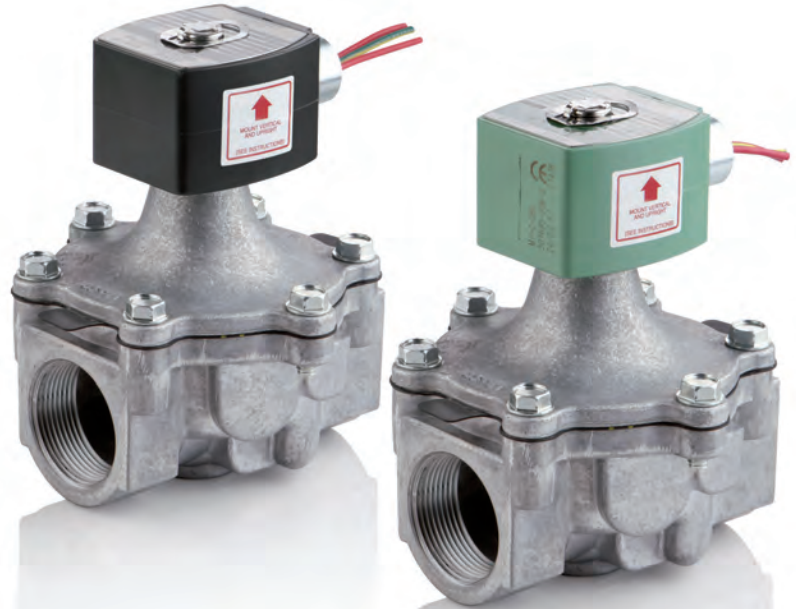

Features & Benefits

- **New Watertight and Hazardous Location DC solenoid operators:**
 - Watertight - RedHat II molded epoxy Type 1, 2, 3S, 4, 4X enclosure with 1/2" conduit hub.
 - Hazardous Location - RedHat II molded epoxy Type 1, 2, 3S, 4, 4X, 6, 6P, 7 (Groups A,B,C,D), 9 (Groups E,F,G) enclosure and a T3C temperature rating code with 1/2" conduit hub.
- **High flow:**
 - Optimized internal valve geometry provides exceptionally high flow
- **Improved ambient temperature range:**
 - Broad ambient range of 32°F to 104°F is ideally suited for cold and warm environments
- **Agency Approvals:**
 - Meets UL 429 Electrically Operated Safety Valve
 - FM Approved Process Control Valve
 - CSA Certified to 22.2 No. 139 Electrically Operated Safety, Automatic Gas Valves ANSI Z21.21 6.5 C/I.
- **ASCO SameDay or ASCO 5Day shipping program**
 - Most constructions are covered
 - Keeps productions lines running smoothly

Specifications

Product Family	Pipe Sizes (in)	Cv Flow (Air, Inert Gas)	Gas Capacity (Million BTU/hr)	Max. OPD (psi)	Ambient Temperature (°F)	Standard Voltages (Volts DC)
8215 Series Normally Closed Solenoid Valves	1"	21	1.1	25	32 to 104	12, 24, 120, 240
	1 1/4"	32	1.7			
	1 1/2"	35	1.9			
	2"	60	3.2	15		



Specialists in Valves, Controls, Pneumatics, Fluid Measurement