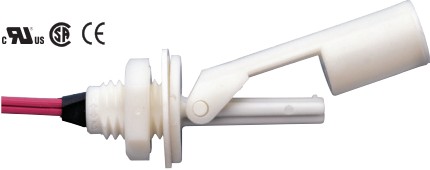


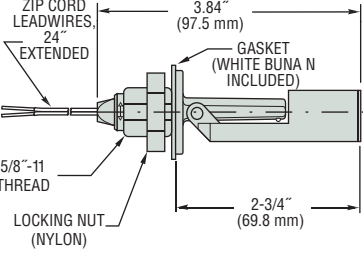
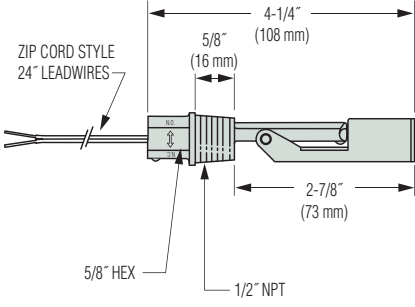
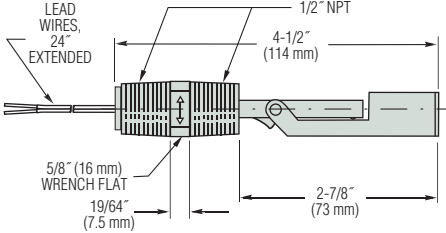


**Small Size – Engineered Plastics**  
**LS-7 Series–Compact Side Mounts**  
**are the Solution to Many Small Tanks**

These low-cost units are ideal for high volume use in small tanks and vessels. Engineered plastics construction offers broad compatibility in water, oils and chemicals.

Type 3 Internal Mounting	Type 5 External Mounting	Type 7 External Mounting
 <p>UL US CE</p> <p>Polypropylene, Nylon or Versaplast™.</p>	 <p>CE UL US CE</p> <p>Polypropylene, Nylon or Versaplast™.</p>	 <p>UL US CE</p> <p>Polypropylene or Nylon; conduit connection.</p>
 <p>ZIP CORD LEADWIRES, 24" EXTENDED</p> <p>3.84" (97.5 mm)</p> <p>GASKET (WHITE BUNA N INCLUDED)</p> <p>5/8"-11 THREAD</p> <p>LOCKING NUT (NYLON)</p> <p>2-3/4" (69.8 mm)</p>	 <p>ZIP CORD STYLE 24" LEADWIRES</p> <p>4-1/4" (108 mm)</p> <p>5/8" (16 mm)</p> <p>2-7/8" (73 mm)</p> <p>5/8" HEX</p> <p>1/2" NPT</p>	 <p>LEAD WIRES, 24" EXTENDED</p> <p>1/2" NPT</p> <p>4-1/2" (114 mm)</p> <p>2-7/8" (73 mm)</p> <p>5/8" (16 mm) WRENCH FLAT 19/64" (7.5 mm)</p>

**Common Specifications**

**Switch Rating\*:** SPST, 20VA  
**Lead Wire Gauge:** No. 22 AWG  
**Mounting Attitude:** Horizontal.

\* See "Electrical Data" on Page X-5 for more information.

**Approvals**

Material	CE	UL Recognized File No. E45168	cUL Recognized	CSA Listed-File No. 30200	NSF Std. 61
Nylon	X	X	X	X	
Polypropylene	X	X	X	X	X
Noryl®	X	X	X		
Versaplast™	X	X	X		

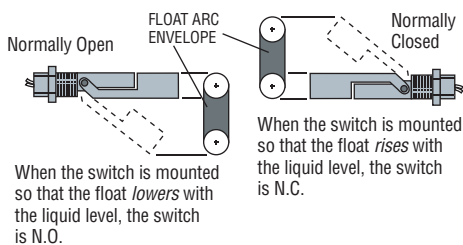
**Media Compatibility**

Media	LS-7 Compatible Types
Oil, Fuel, Hydrocarbons	Nylon
Broad Range of Chemicals and Water	Polypropylene
Limited Chemicals and Water	Noryl®
Oil, Antifreeze, High Temperatures, Corrosive Fluids, Various Chemicals	Versaplast™

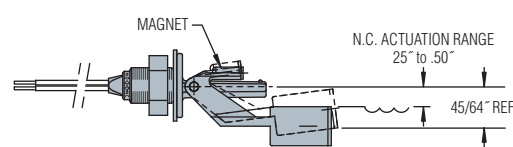
**Switch Operation**

Depending on the mounting position, the float on these switches can rise or lower with the liquid level. By rotating the switch 180°, the switch operation can be Normally Open or Normally Closed (except Type 12).

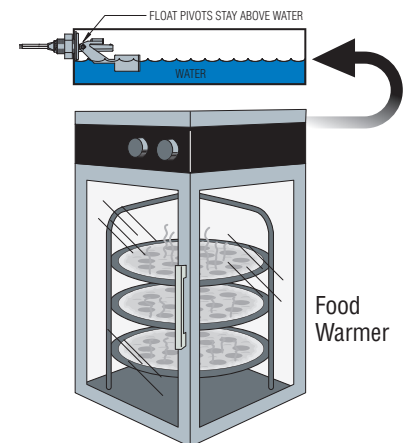
**Types 3, 5, 7, 10 and 13**



**Type 12 – N.C. "Drop Float" Design**

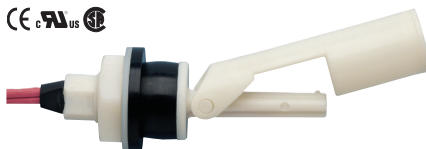
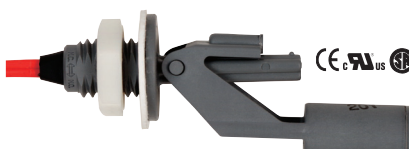

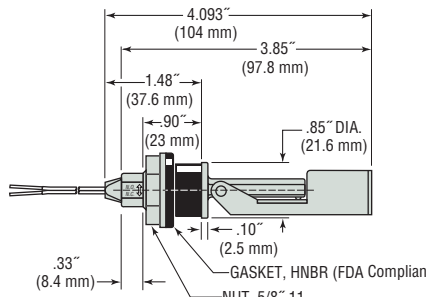
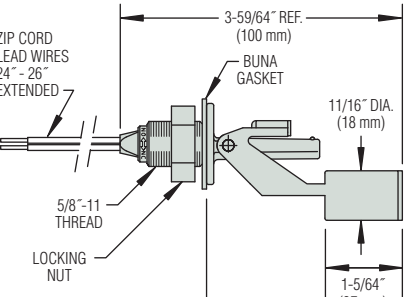
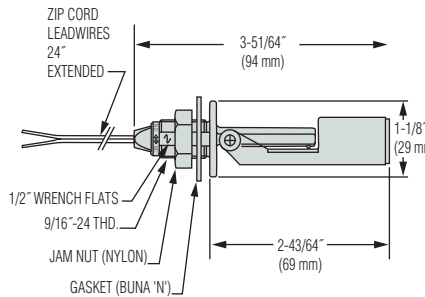


The LS-7 Type 12 is ideal for use on food warmers, hot water heaters, steam cookers, small boilers or wherever water evaporation occurs. The switch is used effectively for either high fluid level alarms or water make up systems. The units are made of Noryl®, which carries NSF approval for use in potable water, and are supplied with FDA-approved Buna gaskets.



Toll-free (800) 533-3285 • Fax: (203) 261-8331 • [www.okeefecontrols.com](http://www.okeefecontrols.com)

- ▶ Nylon is ideal for oils and fuels.
- ▶ NSF Standard 61 polypropylene is ideal for potable water and broad chemicals.
- ▶ Versaplast™ is ideal for corrosive fluids, hot water, antifreeze, chemicals and oils.

Type 10 External Mounting	Type 12 Internal Mounting	Type 13 Internal Mounting
 <p>Externally mounts through and seals non-threaded holes using a HNBR compression gasket.</p>	 <p>Side mount "Drop Down" design for calcifying hot water applications. NSF compliant Noryl®.</p>	 <p>Polypropylene or Nylon.</p>
 <p>Note: Recommended hole size = 7/8" dia. x 1/32" - 5/32" thick panel.</p>		

### How To Order – Select Part Number based on specifications required.

Mounting Type	Materials*			Min. Liquid Sp. Gr.	Operating Temperature	Operating Pressure, Max.	Float Arc Envelope	Part Number
	Stem and Mounting	Float	Lead Wire Jacket					
3	Nylon	TPE†		.65	-40°F to +250°F (-40°C to +121.1°C)	100 psi @ 70°F (6.8 bar @ 20°C)	2.20	<b>165570</b> ⚡
	Polypropylene			.55	-40°F to +225°F (-40°C to +107.2°C)			<b>164520</b> ⚡
	Versaplast™			.80	-40°F to +250°F (-40°C to +121.1°C)			<b>182600</b>
5	Polypropylene	TPE†		.55	-40°F to +225°F (-40°C to +107.2°C)	100 psi @ 70°F (6.8 bar @ 20°C)	1.25	<b>131100</b> ⚡
	Nylon			.65	-40°F to +250°F (-40°C to +121.1°C)			<b>140620</b> ⚡
	Versaplast™	Teflon®	.80	-40°F to +300°F (-40°C to +148.9°C)	<b>177100</b> ⚡			
5 - BSP	Versaplast™	Teflon®		.80	-40°F to +250°F (-40°C to +121.1°C)	100 psi @ 70°F (6.8 bar @ 20°C)	1.25	<b>189422</b>
7	Polypropylene	TPE†		.55	-40°F to +225°F (-40°C to +107.2°C)	100 psi @ 70°F (6.8 bar @ 20°C)	1.50	<b>160450</b> ⚡
	Nylon			.65	-40°F to +250°F (-40°C to +121.1°C)			<b>160460</b> ⚡
10	Polypropylene	TPE†		.55	-40°F to +225°F (-40°C to +107.2°C)	50 psi @ 70°F (3.4 bar @ 20°C)	2.08	<b>165800</b> ⚡
	Nylon			.65	-40°F to +250°F (-40°C to +121.1°C)			<b>165900</b>
12	Noryl®	TPE†		.80	-40°F to +225°F (-40°C to +107.2°C)	100 psi @ 70°F (6.8 bar @ 20°C)	.70	<b>191080</b> ⚡
13	Polypropylene	TPE†		.55	-40°F to +225°F (-40°C to +107.2°C)	100 psi @ 70°F (6.8 bar @ 20°C)	2.20	<b>197050</b>

\* Polysulfone and Ryton® R-4 are available upon request.

† Thermoplastic Elastomer Zip Cord, 22 AWG.

Note: NSF C2 Versions available. Contact factory.

⚡ – Stock Items.